



What

Next generation canisters now available

- Fits every vessel application nationwide
- EPA and CARB required*
- Twenty-four options

Boat builders have a new choice.

- Lower system costs
- Reliable availability
- Same EPA/CARB protection



Why Switch

Plug & Play Change

- Fits all canister systems
- Standard hose barb sizes
- Comes fully assembled

Rigorously Validated

- ABYC C-2 Compliant
- USCG CFR33 Fire tested
- Many more durability tests

Each part is 100% tested

- Pressure Leak
- Flow Restriction

Best In Class Value



- Engineered efficiency
- Low overheads
- Savings passed on

Best In Class Performance

- Smallest packaging size
- Largest fuel tank capacity**
- Lowest air flow restriction

In House Expertise



- System Design Architect
- 10 US Patents

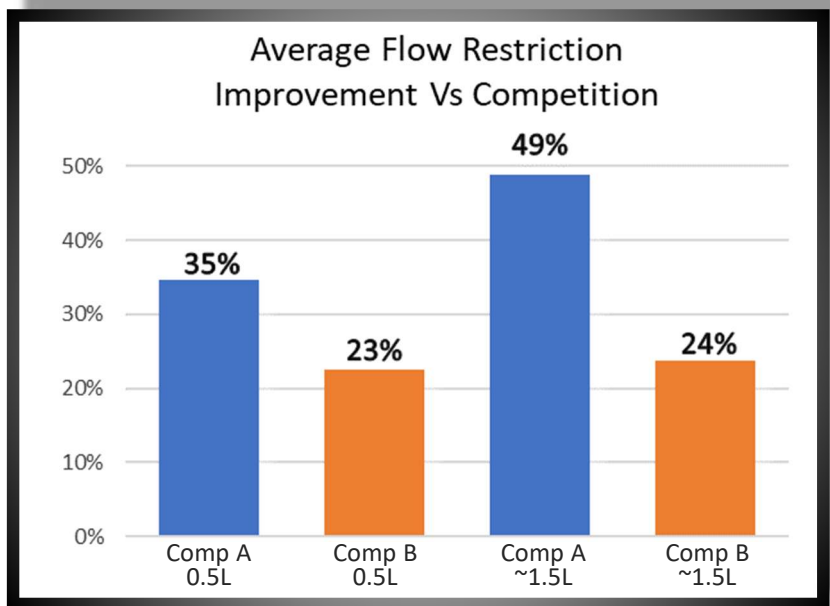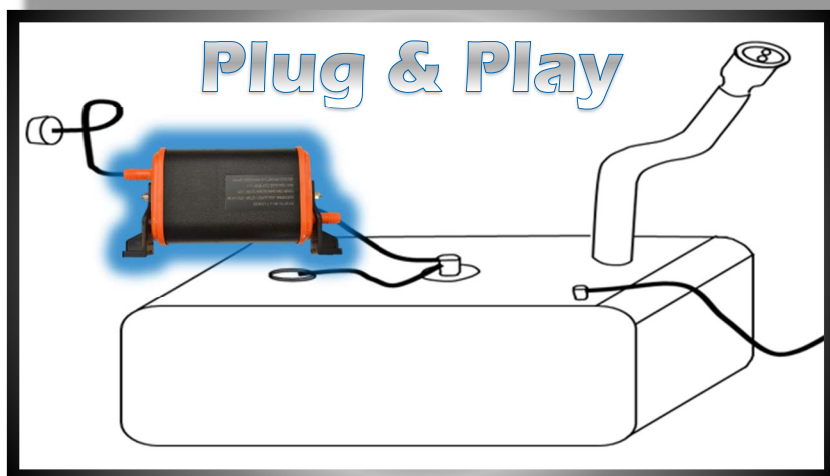

* CFR40.1060 requires a diurnal emission component (PRV or carbon canister) for all vessels sold into the US with permanently installed gasoline fuel tanks
 ** EPA certified tank capacity, per gram of activated carbon



Four Easy Choices

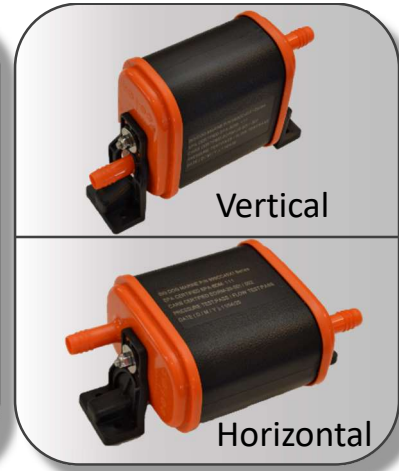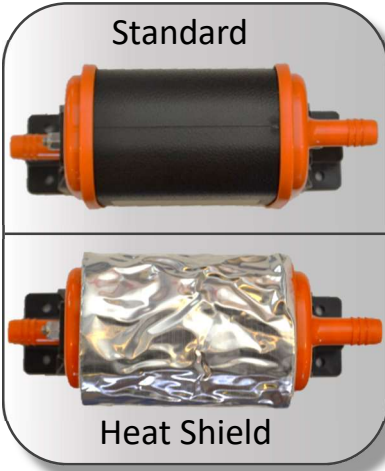

Part Numbers & Sizing Table

	Part Number	Size	Max Fuel Tank Capacity		Barb Size		System Interface	Mounting Orientation	Length Inches	Width Inches	Height Inches
			(trailerable boats)	(non-trailerable *)	#1	#2					
STANDARD SERIES	999CC45H1	Small	80 gal	160 gal	5/8"	5/8"	Venting/Refueling	Horizontal	8.25in	5in	3.63in
	999CC45V1							Vertical			
	999CC65H1	Med	165 gal	330 gal	5/8"	5/8"	Venting/Refueling	Horizontal	11in	5in	3.63in
	999CC65V1							Vertical			
	999CC85H1	Large	275 gal	550 gal	5/8"	5/8"	Venting/Refueling	Horizontal	14in	5in	3.63in
	999CC85V1							Vertical			
	999CC45H2	Small	80 gal	160 gal	5/8"	5/16"	Venting	Horizontal	8.25in	5in	3.63in
	999CC45V2							Vertical			
	999CC65H2	Med	165 gal	330 gal	5/8"	5/16"	Venting	Horizontal	11in	5in	3.63in
	999CC65V2							Vertical			
	999CC85H2	Large	275 gal	550 gal	5/8"	5/16"	Venting	Horizontal	14in	5in	3.63in
	999CC85V2							Vertical			
HEAT SHIELD SERIES	999CC45HSH1	Small	80 gal	160 gal	5/8"	5/8"	Venting/Refueling	Horizontal	8.25in	5.38in	3.88in
	999CC45HSV1							Vertical			
	999CC65HSH1	Med	165 gal	330 gal	5/8"	5/8"	Venting/Refueling	Horizontal	11in	5.38in	3.88in
	999CC65HSV1							Vertical			
	999CC85HSH1	Large	275 gal	550 gal	5/8"	5/8"	Venting/Refueling	Horizontal	14in	5.38in	3.88in
	999CC85HSV1							Vertical			
	999CC45HSH2	Small	80 gal	160 gal	5/8"	5/16"	Venting	Horizontal	8.25in	5.38in	3.88in
	999CC45HSV2							Vertical			
	999CC65HSH2	Med	165 gal	330 gal	5/8"	5/16"	Venting	Horizontal	11in	5.38in	3.88in
	999CC65HSV2							Vertical			
	999CC85HSH2	Large	275 gal	550 gal	5/8"	5/16"	Venting	Horizontal	14in	5.38in	3.88in
	999CC85HSV2							Vertical			

*Non-Trailerable boats are defined as >8.5' wide OR ≥26' long per EPA 40CFR1060